

# Town of Felton

P.O. Box 329  
Felton, DE 19943

Phone 302-284-9365

Fax 302-284-3449

*rgreene@townoffelton.com ~ alupinetti@townoffelton.com*

## RESOLUTION 14-R-03

### A RESOLUTION TO AMEND THE TOWN OF FELTON CONSTRUCTION STANDARDS AND SPECIFICATIONS

**WHEREAS**, on or about January 8, 2007, the Town Council of the Town of Felton adopted an ordinance adopting the "Town of Felton Construction Standards and Specifications" as amended from time to time; and

**WHEREAS**, said ordinance permits amendment to any or all of the Standards and Specifications by simple resolution of the Town Council; and

**WHEREAS**, the Town Engineer has reviewed the current Standards and Specifications in light of current industry standards and practices and has recommended amendments to the current Standards and Specifications; and

**WHEREAS**, it is the desire of the Town Council to adopt the recommendations of the Town Engineer;

**BE IT HEREBY RESOLVED** by the Town Council of the Town of Felton, a majority thereof concurring in Council duly met, that the following Resolution be enacted:

A Resolution to amend the "Town of Felton Construction Standards and Specifications" to be consistent with current standards and practices.

**Section 1.** Section 4.04.A. of the "Town of Felton Construction Standards and Specifications" shall be amended to delete 2) and replace with new section which shall read as follows:

2) Driveways/apron entrances shall be constructed to a minimum thickness of six (6)-inches within Town right-of-way and shall be reinforced with six (6)-inch by six (6)-inch, w/1.4 c w/14 wire mesh or concrete shall contain an adequate mixture of fiber mesh.

See Exhibit A, attached hereto.

**Section 2.** Section 4.04.A of the “Town of Felton Construction Standards and Specifications” shall be amended to add 4) which shall read as follows:

4) A broom finish shall be applied perpendicular to the direction of the traffic.

**Section 3.** Section 4.04.B. of the “Town of Felton Construction Standards and Specifications” shall be amended to add a new first sentence to 1) which shall read as follows:

Bituminous apron entrances shall not be installed with Town right-of-way.

**Section 4.** Section 4.05.C. of the “Town of Felton Construction Standards and Specifications” shall be amended to delete C) and replace with new section which shall read as follows:

C) Sidewalks in vehicular loading areas shall be a minimum thickness of six (6)-inches reinforced with six (6)-inch by six (6)-inch, w1.4 c w/14 wire mesh or concrete shall contain an adequate mixture of fiber mesh.

**Section 5.** These amendments shall be effective on the date of the adoption of this Resolution. These amendments are applicable to all permit applications filed after the effective date of this Resolution.

---

### **Synopsis**

---

This Resolution amends two sections of the “Town of Felton Construction Standards and Specifications” and adds one diagram in a manner consistent with the recommendations of the Town Public Works Superintendent. The amended sections relate to driveway apron entrances.


---

This will certify that this is a true and correct copy of the Resolution duly adopted by the Town Council of the Town of Felton at its regular Council meeting on November 17, 2014.

ATTEST:

Amy Lupinetti.  
Town Clerk

Phil L. Kelley  
Mayor

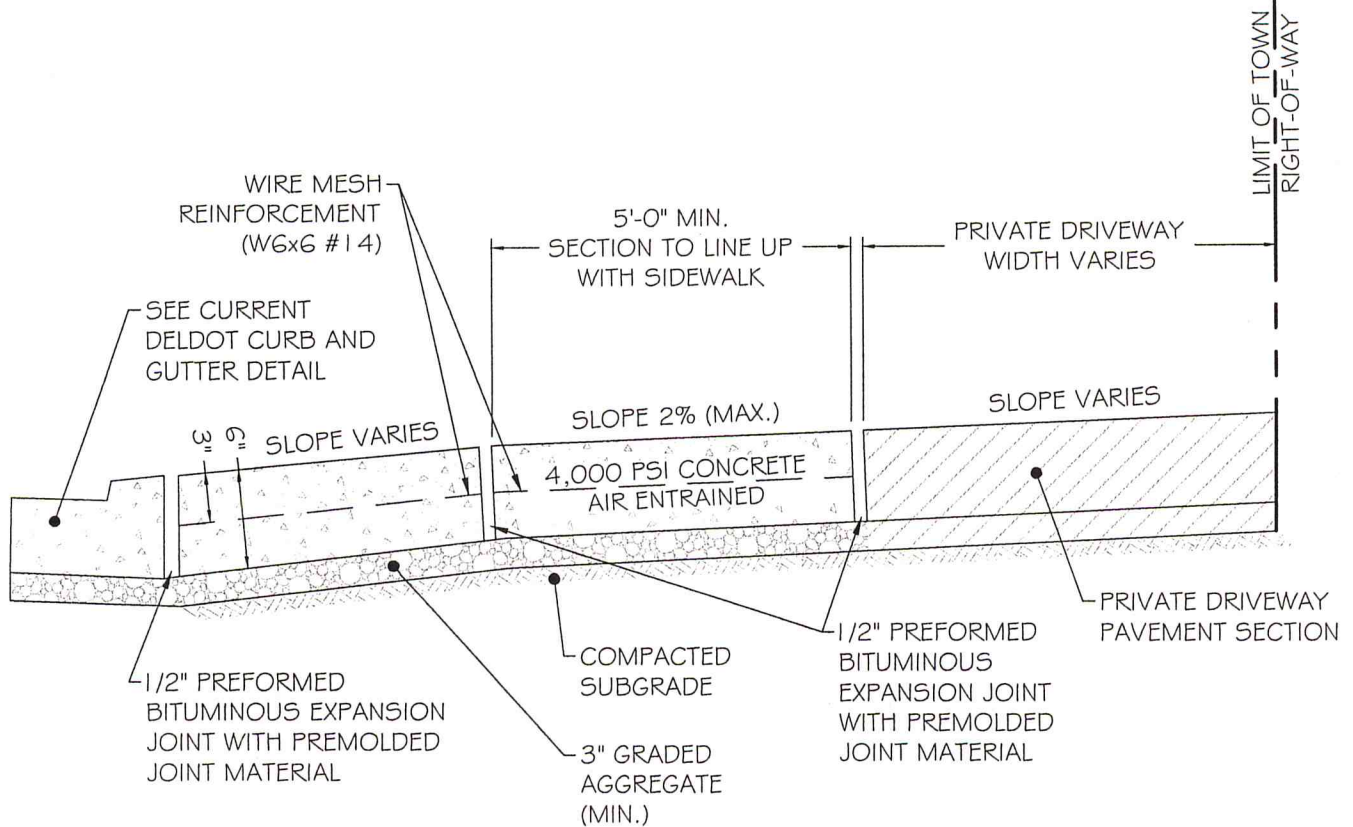

NOTES:

1. SEE TOWN OF FELTON DETAILS D4-1 AND D4-2 FOR ADDITIONAL REQUIREMENTS AND DIMENSIONS.
2. SYNTHETIC FIBER MESH REINFORCED CONCRETE MAY BE USED IN LIEU OF WELDED WIRE MESH REINFORCEMENT. (APPLICATION RATE: MINIMUM 1.5 POUNDS OF SYNTHETIC FIBER REINFORCEMENT PER CUBIC YARD OF CONCRETE.)
3. IF NO SIDEWALK IS PRESENT, DRIVEWAY APRON SHALL EXTEND A MINIMUM OF 6' FROM BACK OF CURB.

DATE: 11-04-14

REVISION:

APPROVED:

TOWN OF FELTON  
SITE CONSTRUCTION  
STANDARDS AND SPECIFICATIONS

DRIVEWAY / APRON  
ENTRANCES

SECTION - 4

DRAWING: D4-3